


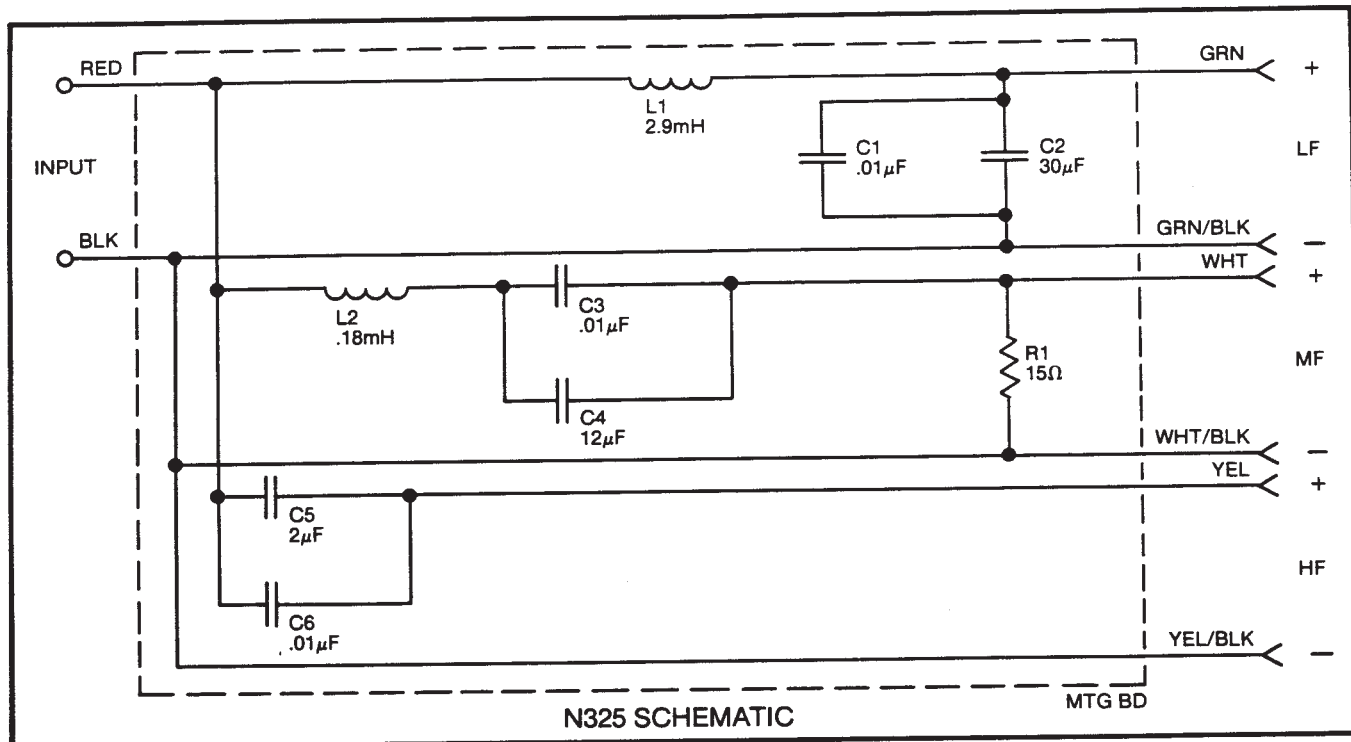

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

Cone Kit: 310G-2
 Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 5
 Sweep Frequency Hz: 30-1200
 D.C. Resistance Ohms: 3.8 min/4.8 max
 Gap Gauge: .051"

Notes:

If Not Serviceable, Replace With: 310G-3
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No. Slightly different.
 Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome: 61521
 Mounting Gasket: 60979

MID RANGE DRIVER:

Cone Kit: 305G-2
 Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 4
 Sweep Frequency Hz: 75-3000
 D.C. Resistance Ohms: 3.8 min/4.6 max
 Gap Gauge: .040"

Notes:

If Not Serviceable, Replace With: Currently Available
 Visual Change: N/A
 Baffle Modification: N/A
 Exact Acoustic Replacement: N/A

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:

Dome: 54721

HIGH FREQUENCY DRIVER:

Diaphragm Kit: 011
 available. Defective driver should be replaced.

Nom. Impedance: 4 Ohm
 Dynamic Test Input V: 3
 Sweep Frequency Hz: 2000-12000
 D.C. Resistance Ohms: 2.7 min/3.3 max
 Gap Gauge: N/A

Notes:

If Not Serviceable, Replace With: 012
 Visual Change: Yes
 Baffle Modification: Yes
 Exact Acoustic Replacement: No. Slightly different.
 Replace both units in a stereo pair.

SYSTEM SPECIFICATIONS:

Nom. Impedance: 8 Ohm
 Rec. Amp Power Range: 10-125 Watts Per Channel
 Crossover Frequencies: 1000 Hz, 6000 Hz
 Sensitivity: 89dB (1 Watt @ 1 Meter)
 Enclosure Dim: 26" x 15-3/4" x 9-1/4" D
 660mm x 400mm x 235mm
 42 lbs. - 19.1 kg.

Shipping Weight:

Additional Parts Currently Available*:

Grill: G325
 Binding Posts: Red: 63635
 Black: 63636

*Other parts may also be available. Check with JBL for details.